

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: G11B 33/00	A2	(11) International Publication Number: WO 00/34954 (43) International Publication Date: 15 June 2000 (15.06.2000)
(21) International Application Number: PCT/DK99/00689 (22) International Filing Date: 08 December 1999 (08.12.1999) (30) Priority Data: PA 1998 01633 09 December 1998 (09.12.1998) DK (60) Parent Application or Grant SCANAVO A/S [/]; (). SOLLING, Tino [/]; (). SOLLING, Tino [/]; ().		Published
(54) Title: A STORAGE DEVICE FOR A DATA CARRIER (54) Titre: DISPOSITIF DE RANGEMENT POUR SUPPORT DE DONNEES		
(57) Abstract <p>The invention relates to a storage device comprising: a base element, at least two flexible arms extending in a direction perpendicular to the base element, at least one support element for supporting the data carrier at the outer circumference, the support element leaving a space allowing a grip under the circumferential rim of the data carrier. The invention further relates to a box comprising a storage device according to the invention.</p> (57) Abrégé <p>L'invention concerne un dispositif de rangement comprenant un élément de base, au moins deux bras flexibles étendus dans une direction perpendiculaire à l'élément de base, et au moins un élément de soutien pour soutenir le support de données à la circonférence externe. L'élément de soutien comporte un espace qui permet la préhension sous le bord de la circonférence du support de données. L'invention concerne également une boîte comprenant ce type de dispositif de rangement.</p>		

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : G11B 33/00	A2	(11) International Publication Number: WO 00/34954 (43) International Publication Date: 15 June 2000 (15.06.00)
<p>(21) International Application Number: PCT/DK99/00689</p> <p>(22) International Filing Date: 8 December 1999 (08.12.99)</p> <p>(30) Priority Data: PA 1998 01633 9 December 1998 (09.12.98) DK</p> <p>(71) Applicant (for all designated States except US): SCANAVO A/S [DK/DK]; Billedvej 2, DK-2100 København Ø (DK).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): SØLLING, Tino [DK/DK]; Scanavo A/S, Billedvej 2, DK-2100 København Ø (DK).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published Without international search report and to be republished upon receipt of that report.</p>	

(54) Title: A STORAGE DEVICE FOR A DATA CARRIER

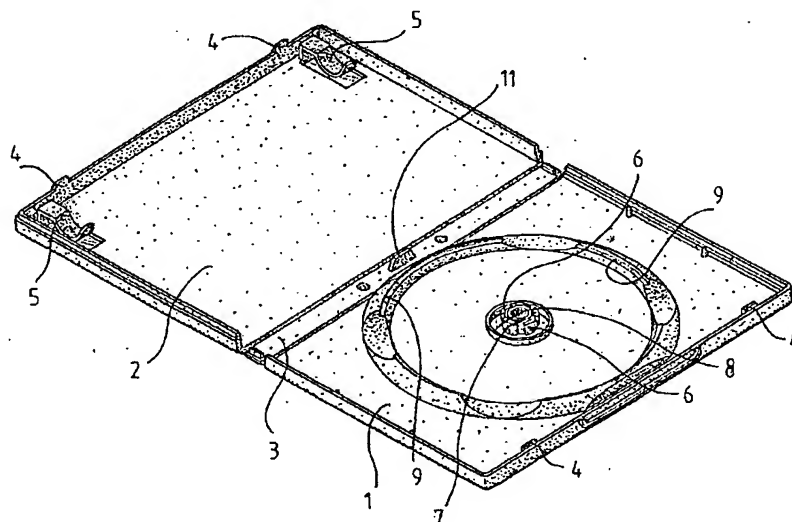

(57) Abstract

The invention relates to a storage device comprising: a base element, at least two flexible arms extending in a direction perpendicular to the base element, at least one support element for supporting the data carrier at the outer circumference, the support element leaving a space allowing a grip under the circumferential rim of the data carrier. The invention further relates to a box comprising a storage device according to the invention.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Description

5

10

15

20

25

30

35

40

45

50

55

A storage device for a data carrier

BACKGROUND OF THE INVENTION

Data carriers of the type relevant for the present invention comprise a carrier surface having a circular outer circumference. The data carrier comprises a central hole. Such data carrier is used for storage of various sorts of data, primarily digital data.

Examples of such data carriers are CD's and DVD's, e.g. for music storage, for data program storage, for game storage or for movie storage. The disc's have the same physical dimensions.

For the storage of the data carrier itself various storage devices have been used and described.

One example is the commonly known jewel box, which normally is used for storage of music CD's. This previously known box comprise a base plate from which a number of arms project upwardly in a circular arrangement. The arms are flexible and are adapted to hold the CD at the central hole of this when it is pressed downward over the arms. In order to remove the CD from the box it is necessary to grip the disc and, by applying a pulling force, release the disc from the arms. This procedure gives rise to several problems. First of all because it is difficult to get hold of the disc by hand as the access to the rim of the disc is limited, and secondly the grip actually obtained may be poor, possibly leading to a loss of grip. Furthermore the data-carrying surface of the storage device may contact the base part, which may lead to the loss or damage of data. This is a minor problem in connection with music, since data correction most often is present in the reading devices. In connection with other types of data this may however be crucial. It is obvious that this previously known device due to these disadvantages need to be replaced.

A further previously known device is disclosed in WO 96/14636. This previously known device features a press and release function, which by means of either the flexibility of flexible ejector elements in a base element or the flexibility of the disc

5 itself is intended to eject the disc upon applying a pressure on a locking element
holding the disc at the central hole. The release function does however in many cases
not show a satisfactory functionality, as the locking element in many cases still lock
10 the disc after application of the release pressure. This malfunction may lead to
5 damage of the disc when the user afterwards tries to remove the disc from the storage
device. Furthermore the providing of a mechanical release and ejector system does
require a significant accuracy in the manufacturing process in order to provide a
15 satisfactory function with a low or zero failure frequency in the release function. The
lack of the required accuracy in the tolerances may in fact lead to the before
10 mentioned malfunction.

20 I still further prior art storage device is disclosed in EP 0356539. This previously
known storage device is like the one described above of the type featuring a press and
release function. The device is described as a development taking its starting point in
15 a storage device corresponding to the above mentioned jewel box. The difficulties
25 mentioned above in connection with WO96/14636 also counts for this storage device,
meaning that a significant accuracy is required in order to ensure a satisfactory
function and that the risk of a malfunction is high.

30 20 Based on this prior art the aim of the present invention is to provide a storage device
for a data carrier, which has a reliable function, which facilitates the release of the
data carrier from the storage device and which at the same time is simple from a
35 manufacturing point of view.

25 SUMMARY OF THE INVENTION

40 According to the invention this is obtained by means of a storage device comprising:
a base element;
at least two flexible arms extending in a direction substantially perpendicular to the
30 base element;
45 at least one support elements for supporting the data carrier at the outer
circumference;
the support element leaving a space allowing a grip under the circumferential rim of
50 the data carrier.

5

10

15

20

25

30

35

40

45

50

55

By means of such storage device it is possible to perform a reliable release of the data carrier from the storage device due to the possibility of accessing the rim of the data carrier in a more reliable and easy manner. The locking means will not provide any partly locking malfunction as they do not comprise any elements, where the function of these rely on the function of other similar elements. Since there are no mutually dependent release and ejector elements which requires a significant accuracy in the manufacturing process the storage device according to the invention does beside the above mentioned improved functionality provide a storage device which is simple from a manufacturing point of view. This also provides for more cost-effective manufacturing as the wear of the moulds may be within larger tolerances, i.e. that more storage devices may be moulded in one mould before the tolerances of wear are reached for still having the proper functionality.

Preferably there are between two and six, more preferably three or four discrete support elements for supporting the data carrier at the outer circumference. Between two adjacent support elements a space is left for accessing the data carrier.

In a preferred embodiment the storage device further comprise support means adapted for supporting the data carrier in the area between the central hole and the outer rim. This feature further facilitates the release of the data carrier from the arms. This support means may be in the form of a circular wall protruding from the base part and in a substantially perpendicular direction to this.

In a further preferred embodiment the storage device comprise means for limiting the movement inward movement of the arms towards the centre, e.g. in the form of a cylinder shaped element between the arms or within the area circumscribed by the arms.

The support means at the rim of the data carrier may be divided by curved recesses, which leads the users hands in the correct release position and which furthermore prevents the user from having finger injuries, as may be the case when sharp and abrupt edges are present.

5 In a further preferred embodiment the support means for supporting the outer rim of the data carrier are curved in a direction from the base part and towards the centre of the holding means. This also provides for an improved user safety and comfort.

10 5 The storage device may be incorporated in a box comprising two mutually pivotally connected parts. Preferably the base part forms one of these parts and a lid constitutes the other part.

15 The two parts comprise locking elements for releasable locking the two parts.

10 20 The lid part may comprise means for holding an insert, e.g. a user direction or a description of contents.

25 15 It is a possibility that the base part forms a loose element, which is placed inside a box having a bottom part and a lid, however this embodiment is far more irrational from a manufacturing point of view as more separate parts are necessary for completing the box.

30 BRIEF DESCRIPTION OF THE DRAWINGS

20 FIG. 1 is a perspective view of a preferred embodiment of the storage device according to the invention;

35 FIG. 2 is a top view of the storage device shown in FIG. 1;

FIG. 3 is sectional view according to the line 3-3 in FIG. 2.

25 DESCRIPTION OF THE PREFERRED EMBODIMENT

40 From FIG. 1 a storage device appears in the form of a box comprising a base element 1 and a lid 2. The base element and the lid are pivotally connected to a back element 3 and comprise means 4 for interlocking the two parts in a releasable manner. The lid comprises two flexible elements 5 for holding an insert.

50 The base element comprises a number of arms 6 extending perpendicular to the base element; in this case five arms 6. The number of arms may be lower or higher, but it

5 has shown to be convenient that the number is of the order of four to six. Hereby the arms comply with the required rigidity and strength when the box is moulded from a soft plastics material in an injection moulding process. The arms are arranged in a circular order corresponding to the diameter of the hole in the data carrier. Within the
10 5 circle of the arms a movement-limiting element 7 or a stop is provided in the form of a cylindrical element. By means of this it is possible to avoid a possible fatigue of the arms 6 due to several to extensive bending operations of these. Furthermore this
15 element 7 serves as a rest for the users one finger when removing the data carrier from the storage device. In this manner the arms are freely movable without influence from
10 the users finger. Surrounding the arms a circular support element 8 is provided to support the data carrier close to the central hole, preferably outside the data carrying
20 area. At a further distance from the arms a number of discrete support elements 9, four in all, are provided for supporting the outer rim of the data carrier. The discrete support elements are provided with a mutual distance, which allows the user to
15 access the rim of the data carrier in a safe and reliable manner. The area between the discrete support elements is formed by curved recesses, which when abutting the
25 central element 7 with one finger allows for gripping the rim of the data carrier with another finger, preferably the thumb, whereby the data carrier may be released in the desired safe and reliable manner.

30 20 From FIG. 2 the features shown on FIG. 1 and described above becomes apparent.

35 From FIG. 3, which is a sectional view, the arms are shown in more detail. It becomes apparent that the arms 6 each comprise a radial outward extending protrusion 10,
25 which serves the purpose of locking the data carrier when the hole of this is pressed downwards over the arms.

40 On the inside of the back element 3 a holding element 11 appears in the form of a fin. The holding element serves the purpose of preventing the disc from being released
30 from the central holding element as the holding element protrudes beyond the area 9 when the storage device is closed. When the storage device is in its open position as
45 shown in FIGS. 1-3 the holding element is in a neutral position. Further such holding elements may be provided in the lid part 2.

6

5

The arms 6 may be arranged in such a manner and with such dimensions that the disc once placed and secured may be turned with very limited friction, which will allow the user to read text on the disc with out removing the disc from the storage device or without turning the latter.

10

5

The area 8 may be slightly higher than the area 9, hereby allowing a disc to be turned without contact at the outer circumference.

15

10

20

25

30

35

40

45

50

55

Claims

5

10

15

20

25

30

35

40

45

50

55

CLAIMS

5

10

15

20

25

30

35

40

45

50

55

1. A storage device comprising:
a base element;
at least two flexible arms extending in a direction perpendicular to the base element;
at least one support elements for supporting the data carrier at the outer circumference;
the support element leaving a space allowing a grip under the circumferential rim of the data carrier.
2. A storage device according to claim 1, characterised in further comprising support means adapted for supporting the data carrier in the area between the central hole and the outer rim.
3. A storage device according to claim 2, characterised in that the support means for supporting the data carrier between the central hole and the outer rim is constituted by a circular wall protruding from the base part and in a direction substantially perpendicular to this.
4. A storage device according to any of the claims 1-3, characterised in comprising means for limiting the movement of the arms, e.g. in the form of a cylinder shaped element between the arms or within the area circumscribed by the arms.
5. A storage device according to any of the claims 1-4, characterised in that the support means at the outer rim of the data carrier are separated by curved recesses.
6. A storage device according to any of the claims 1-5, characterised in that the support means at the outer rim of the data carrier are curved in a direction from the base part and towards the centre of the holding means.

- 5 7. A box comprising a base part and a lid, characterised in that the base portion
comprise:
at least two flexible arms extending in a direction perpendicular to the base
10 element;
5 at least two discrete support elements for supporting the data carrier at the
outer circumference;
the discrete support elements leaving a space between each other allowing a
15 grip under the circumferential rim of the data carrier.
- 10 8. A box according to claim 7, characterised in the base part and the lid comprise
locking elements for releasable locking the two parts.
- 20 9. A box according to claim 7 or 8, characterised in that the lid part comprise
means for holding a insert, e.g. a user direction or a description of contents.
- 15 10. A box according to claim 7, 8 or 9, characterised in that at least one holding
25 element is provided for preventing the data carrier from being released when
the box is closed and where the holding element in the open position of the
30 box does not influence the release of the data carrier.
- 20

35

40

45

50

55

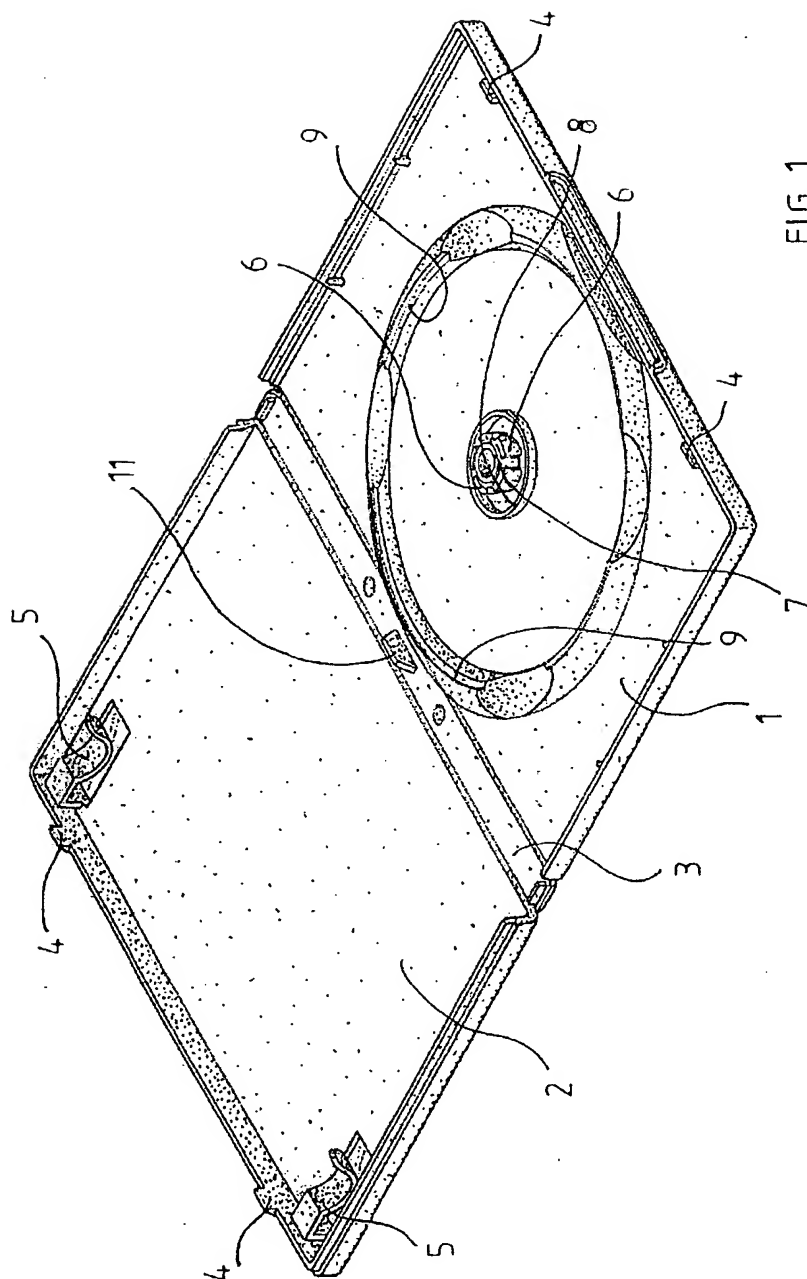
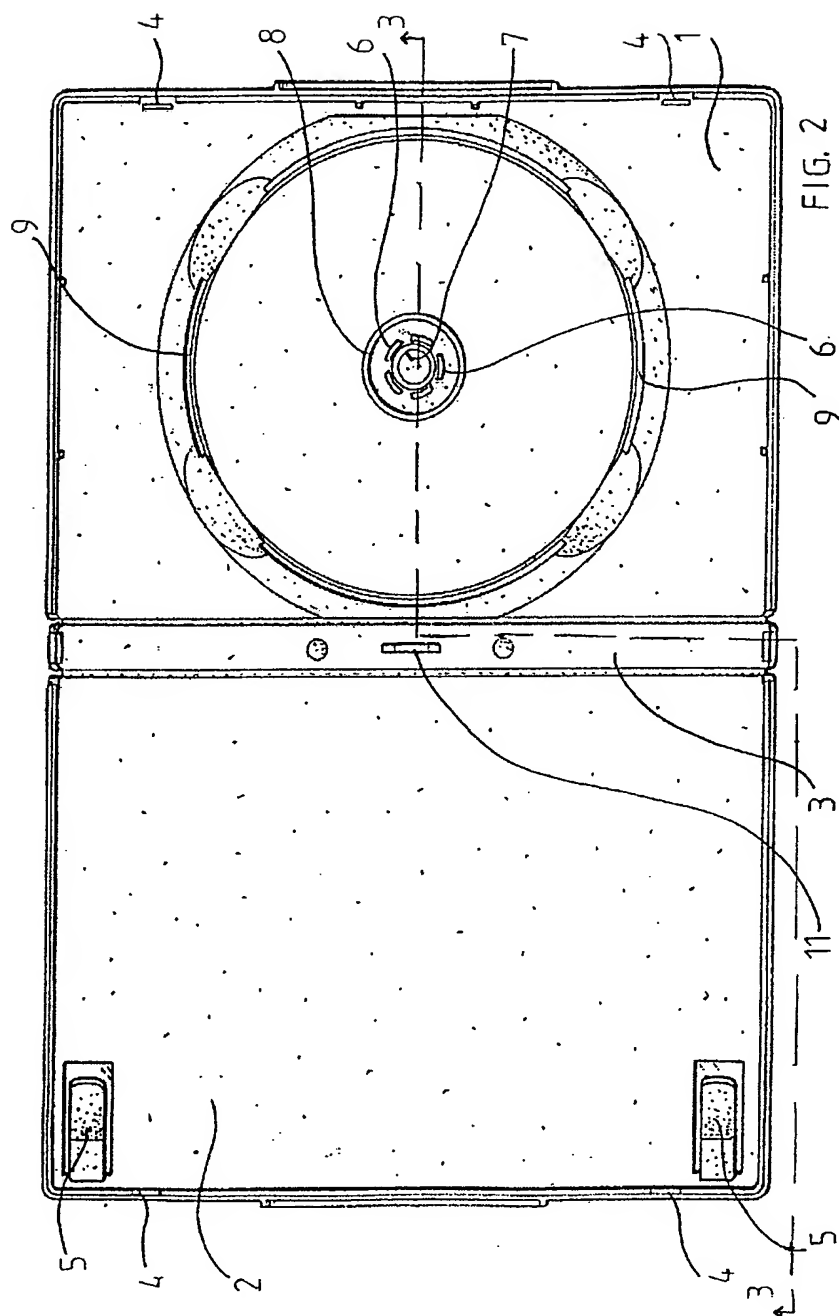


FIG. 1



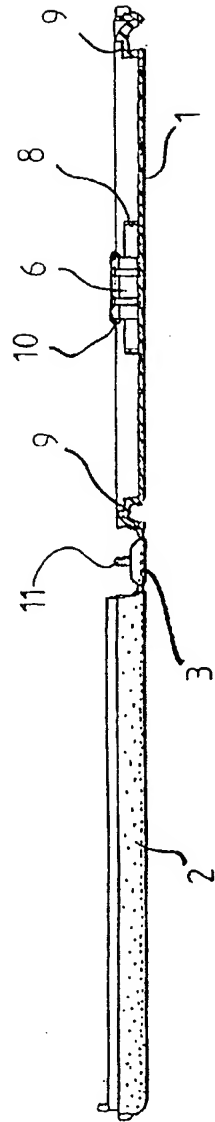


FIG. 3